

# REDWOOD

Preceding model R12000

8MM RADIANT COOKTOP



INTEGRATED ASHPAN




Supreme output and efficiency, for abundantly heating open plan spaces.

- Efficiently heats huge areas
- Large 8mm radiant cook top
- Optional 2-speed fan for convection heating
- 6mm steel firebox for durability
- Lined with masonry fire bricks and a steel baffle for efficient burning
- Built-in ash pan to collect ash and make disposal easier

MODEL	984911
FINISH	VHT Black
FIREBOX	Steel
EST. PEAK OUTPUT	30kW
APPROX. HEAT AREA	300m <sup>2</sup>
EMISSIONS	0.8g/kg
EFFICIENCY	64%
DIMENSIONS (WxDxH)	790 x 715 x 799mm
FIREBOX DIMENSIONS (WxDxH)	605 x 470 x 365mm
LOG SIZE	560mm

Minimum distance to heat sensitive materials (mm) when a flue deflector is fitted, and floor protector sizes as per standard AS/NZS 2918:2001.

FLUE SHIELD	A	B	C	D	E	F	G	H
FDR	213	500	300	87	240	413	895	630
	I	J	K	L	M	N	R	W
	664	964	1158	1611	1374	720	861	790

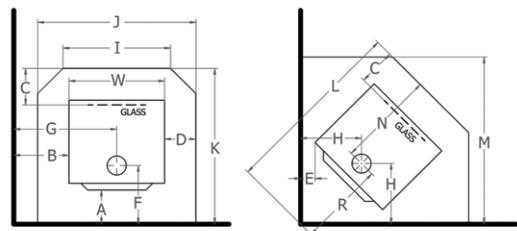

FDR: Flomet Dropbox with Single Skin Reflective Shield.

